

Bi-Folding Door Order Form



Sliders (UK) Limited Unit 232, Oldfield Road, Walton Summit, Bamber Bridge, Lancashire PR5 8BG
Tel: 01772 698222 Fax: 01772 698333 Email: sales@sliders-uk.com www.sliders-uk.com

Contact Details:

Company Name: _____

Address: _____

Postcode: _____

Telephone: _____

Fax: _____

Date Required: _____ Order No: _____
(Lead time 2 weeks)

Order Reference: _____

Special Instructions: _____

Opening Configuration:

Open Out Open In

Bi-Fold Scheme No. (viewed from outside)

Example:

Total quantity of sashes	Quantity of sashes that slide/open to LHS	Quantity of sashes that slide/open to RHS
3	2	1



Position of Doors

Sash and Frame:

Featured Sash/Frame Bevelled Sash/Frame

Bevelled Bead Featured Bead

Standard Colours: (other colours on request)

White (as standard) Brilliant White

Mahogany Mahogany on White

Golden Oak Golden Oak on White

Rosewood Rosewood on White

Door Size:

Overall Frame Width (mm) _____

Overall Frame Height (mm) _____

Note: a 10mm gap must be left between your frame size and opening

Ancillaries:

15mm Frame Extension to LHS RHS TOP

35mm Frame Extension to LHS RHS TOP

(202, 220, 404, 440, 606, 660 schemes require a 15mm extension on lock side)

Ventilation:

Trickle vent(s) required

Trickle vents can not be fitted in adjacent folding sashes or they will clash - please indicate the positions required.

Master Door Handle Colour:

White (as standard) Black

Anodised Gold PVD Gold

Anodised Silver PVD Chrome

Frame Hinge Colour:

White (as standard) Brown

PVD Gold PVD Chrome

Bi-Fold Door Handle Colour (flat):

White (as standard)

Silver

Brown

Bi-Fold Door Hinge Colour:

White (as standard) Brown

Locking Options:

"ULTIMATE" High Security Specification*

Standard bi-fold door specification

Internal / External locking on schemes*

202, 220, 440, 404, 606 or 660 (open out only)

Standard option on **ULTIMATE** bi-fold doors

Diagram: (viewed from outside)



* Choose the 'Ultimate' in security and give your customer the 'Ultimate' peace of mind.



**New
"Ultimate"
High Security**



Sliders (UK) Limited Unit 232, Oldfield Road, Walton Summit, Bamber Bridge, Lancashire PR5 8BG
Tel: 01772 698222 Fax: 01772 698333 Email: sales@sliders-uk.com www.sliders-uk.com

slidersuk

Bi-Folding Doors

with a difference...


PVCU bi-fold doors are inherently insecure. The hardware used on other doors is typically far less secure than would be used on resi or French doors and yet homeowners are unwittingly expected to pay thousands of pounds to have them installed.

So would you rather fit and guarantee:




a) A typical bi-fold door

- Low security hardware.
 - 144 mm or more threshold height.
 - Stack of cill, add-on & frame.
 - Bogie track unsupported.
 - Z & T sashes cut down.
- ✗ Highly vulnerable to attack.
 - ✗ Unstable design.
 - ✗ Ongoing call back requests.
 - ✗ Unsightly joints.
 - ✗ Poor value.

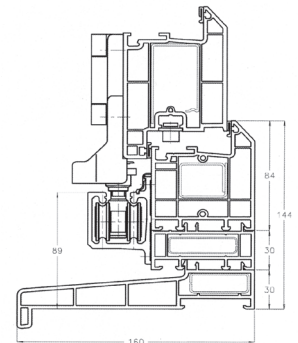

b) A Sliders UK "Ultimate" PVC/Aluminium Bi-Fold Door?

- Hoppe Tokyo PAS 24 handle fitted as standard.
 - Fully retractable hooks and low level keeps.
 - Anti-bump cylinders as standard.
 - Aluminium sub frame incorporate cill projection and track.
 - Sash joints with bespoke aluminium posts.
 - Double seals on all sash joints.
- ✓ Revolutionary high security hardware.
 - ✓ More secure than any other PVC bi-fold door.
 - ✓ Extremely reliable, minimising costly call backs for adjustments.
 - ✓ Solid platform provides stability and reliability.
 - ✓ Superior sash strength and weather performance.

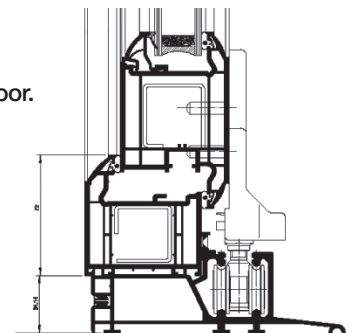

*Option to include locks to all sashes

The aesthetics of PVC with the strength of aluminium.

The best bi-folds - by far!

