

The Ultimate Patio Door (Secured By Design)



Additional Prescribed Fitting Instructions

In order to fully meet the requirements of Secured By Design and The Security Guarantee, the sealed units must be constructed with laminated glass to one side and toughened to the other. The laminated glass can be on either inside or outside.

For more details on the Security Guarantee, please contact Sliders UK on **01772 698222**.

The fixed sash is retained by fixing at certain points which will need to be removed to allow fixing of the frame. (Fig. 1). These should be retained in a safe place and re-fitted at the same points. (See Fig. 1).

The frame must be fixed 200mm in from the corners, and then at 500mm intervals all the way around the frame, except for the head where fixing foam can be used.

Twin fixings down the lock side are to be used as normal. (See Fitting Guide).

Secured by Design



Official Police Security Initiative

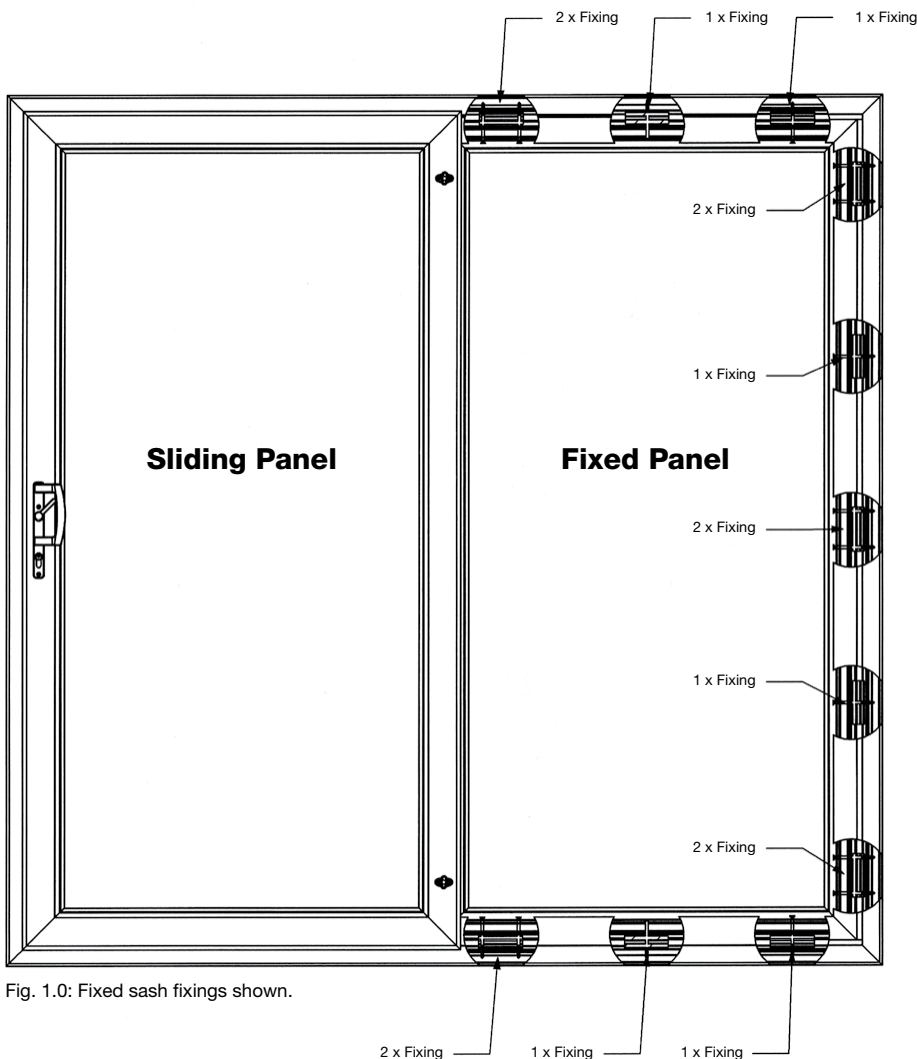


Fig. 1.0: Fixed sash fixings shown.

Additional Prescribed Fitting Instructions

In order that the installation meets the requirements of SBD and The Security Guarantee; correct packing of the sealed units must be adhered to.



Fig. 2.0 illustrates the packing points. The bridge packers will already be fitted to both the sliding and fixed panels.

There are two different types of packers that can be used. Please see images below.

Bridge packers are used in positions 'A1' and Standard Flat Glass Packers are used in positions 'A2' when fitting glass.

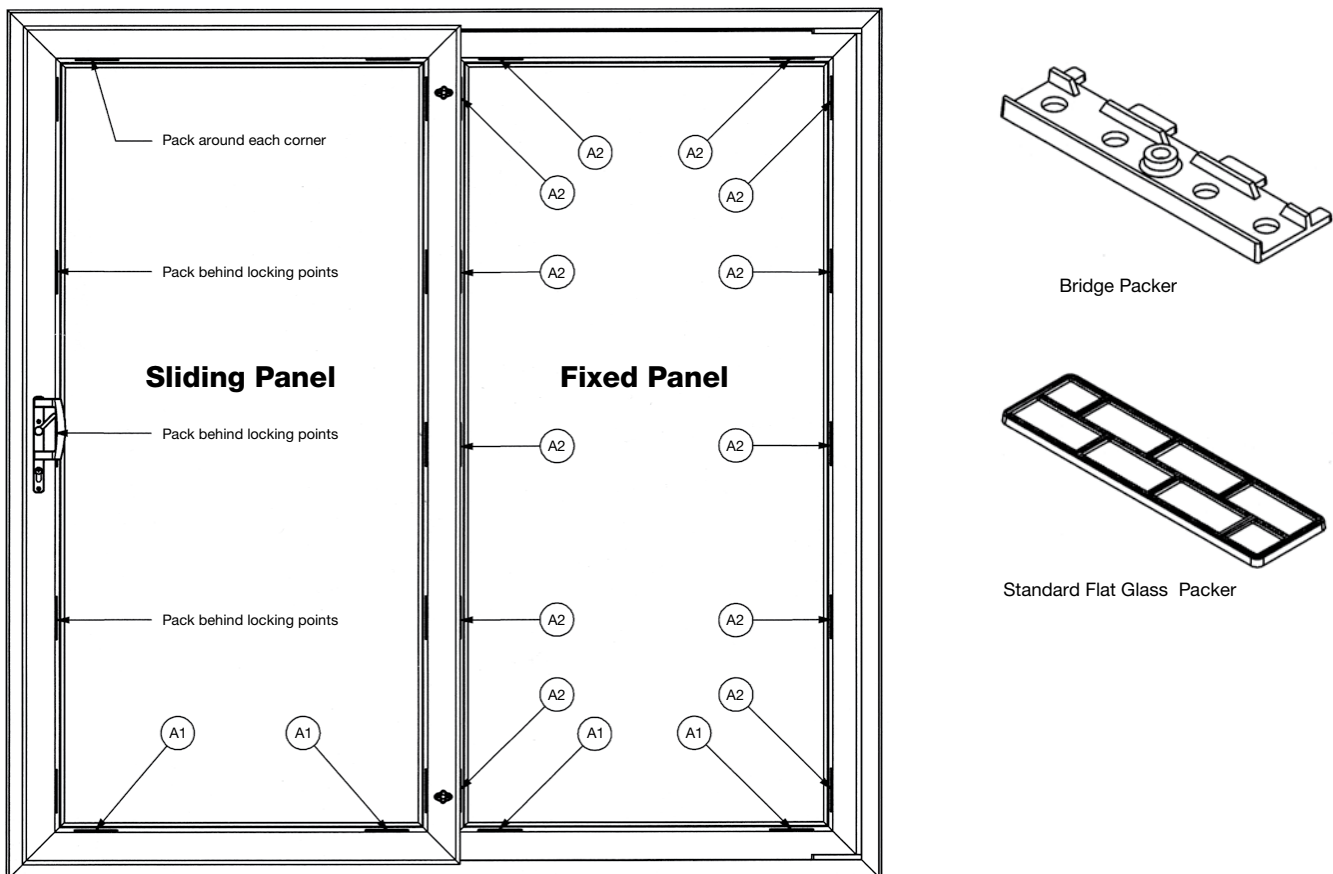


Fig. 2.0: Packing points illustrated. Packer positions are made up of a combination of Bridge packer and a suitable number of flat packers (as required). Repeat packing procedure on sliding panel.